

WALL-IT

TEST REPORT

SCOPE OF WORK

Polyester fiber acoustic panel

REPORT NUMBER

191106001SHF-001

TEST DATE(S)

2019-11-06 - 2019-11-22

ISSUE DATE

2019-11-22

PAGES


7

DOCUMENT CONTROL NUMBER

LFT-APAC-SHF-OP-10k(May 1, 2019)

© 2019 INTERTEK

Intertek Testing Services Shenzhen Ltd. Shanghai Fengxian Branch

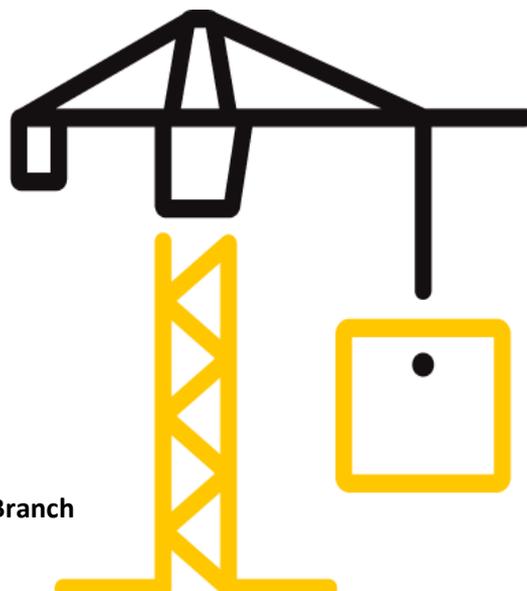

Test Report

Statement

- 1.This report is invalid without company's special seal for testing on assigned page.
- 2.This report is invalid without authorized person's signature.
- 3.This report is invalid where any unauthorized modification indicated.
- 4.Don't copy this report in partial (except full copy) without any official approval in written by our company. This report is invalid without re-stamping the special seal for testing in copying report.
- 5.Any holder of this document is advised that this report is for the exclusive use of Intertek's Customer and is provided pursuant to the agreement between Intertek and its Customer. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. This report was made with due care within the limitation of a defined scope of work and on the basis of information, materials and instructions received from the Customer or its nominated third parties. Intertek is under no obligation to refer to or report upon any facts or circumstances which are outside the specific instructions received and accepts no responsibility to any parties whatsoever, following the issue of the report, for any matters arising outside the agreed scope of the works. The tests results are not intended to be a recommendation for any particular course of action. Customer is responsible for acting as it sees fit on the basis of such results.
- 6.Intertek's written consent is required to use Intertek's name or logo on the object, product or service being tested. The observations and test results in this report relate only to the sample under test. This report alone does not indicate that the item, product or service has passed any Intertek certification program.

Test Report

Issue Date: 2019-11-22 Intertek Report No. 191106001SHF-001
 Applicant: WALL-IT
 Address: Skøyensvingen 14G, Oslo, NORWAY
 Attn: Ingvar Hagen
 Brand: tek:STILLE by WALL-IT
 Product Name : tek:STILLE
 Test Type : Performance test, samples provided by the applicant.

Product Information

| | | | |
|---------------------------|--------------------------------|----------------------|------------|
| Product Name | Polyester fiber acoustic panel | Brand | / |
| Sample Description | Good Condition | Sample Amount | 46 pcs |
| | | Received Date | 2019-11-05 |
| Sample ID | Model | Specification | |
| S191106001SHF.001~002 | / | 9mm | |
| | | | |

Test Methods And Standards

| | |
|-------------------------------|--|
| Test Standard | EN 13823:2010+A1:2014* and EN ISO 11925-2:2010 |
| Specification Standard | EN 13501-1:2018 |
| Test Conclusion | The samples were tested according to the above standards, and the results are shown in the following page. |

Note:

1.This report relates specifically to the sample(s) that were drawn and provided by the applicant or their nominated third party. The reported result(s) provide no warranty or verification on the sample(s) representing any specific goods and/or shipment and only relate to the sample(s) as received and tested.

Report Authorized






 Name: Sally Xie Name: Tod Qian
 Title: Reviewer Title: Project Engineer

Test Report

Issue Date: 2019-11-22

Intertek Report No. 191106001SHF-001

Test Items, Method and Results:

EN 13501-1:2018 Fire classification of construction products and building elements - Part 1: Classification using data from reaction to fire tests

1.1 SINGLE BURNING ITEM TEST

The test was conducted in accordance with EN 13823. This test evaluates the potential contribution of a product to the development of a fire, under a fire situation simulating a single burning item near to the product.

1.2 IGNITABILITY TEST

The test was conducted in accordance with EN ISO 11925-2. This test evaluates the ignitability of a product under exposure to a small flame.

1.3 CLASSIFICATION CRITERIA

The classification was determined in accordance with EN 13501-1:2018. The class B with its corresponding fire performance is given in the table below.

Table - Classes of reaction to fire performance for construction products excluding floorings and linear pipe thermal insulation products.

| Class | Test Method(s) | Classification criteria | Additional classifications |
|-------|--|---|--|
| B | EN 13823 and | $FIGRA_{0.2MJ} \leq 120 \text{ W/s}$ and $LFS < \text{edge of specimen}$ and $THR_{600s} \leq 7.5 \text{ MJ}$ | Smoke production ^a and Flaming droplets/particles ^b |
| | EN ISO 11925-2 ^c Exposure = 30 s | $F_S \leq 150 \text{ mm}$ within 60 s | |

Note:

a. $s1 = SMOGRA \leq 30 \text{ m}^2/\text{s}^2$ and $TSP_{600s} \leq 50 \text{ m}^2$; $s2 = SMOGRA \leq 180 \text{ m}^2/\text{s}^2$ and $TSP_{600s} \leq 200 \text{ m}^2$; $s3 = \text{not } s1 \text{ or } s2$

b. $d0 = \text{No flaming droplets/particles in EN 13823 within 600s}$;

$d1 = \text{no flaming droplets/particles persisting longer than 10s in EN 13823 within 600s}$;

$d2 = \text{not } d0 \text{ or } d1$.

Ignition of the paper in EN ISO 11925-2 results in a $d2$ classification.

c. Under conditions of surface flame attack and, if appropriate to the end use application of the product, edge flame attack.

Test Report

Issue Date: 2019-11-22

Intertek Report No. 191106001SHF-001

Test Items, Method and Results:

2 RESULTS AND OBSERATIONS

| Method | Parameter | Result |
|--|---|---|
| EN 13823:2010+A1:2014* | FIGRA _{0.2MJ} , W/s | 9 |
| | THR _{600s} , MJ | 1.0 |
| | LFS, m | <Edge of Specimen |
| | SMOGR _A , m ² /s ² | 0 |
| | TSP _{600s} , m ² | 14 |
| | Flaming Droplets/Particles | No flaming droplets/particles occur within 600s |
| EN ISO 11925-2:2010 Exposure = 30 s | F _s ≤ 150 mm within 60 s | Yes |
| | Ignition of the paper | No |

Note

- *Test item is subcontracted on accreditation by CNAS L0057.
- Per EN 13823, the samples were glued on the backing board. Backing board was a 12mm thick calcium silicate board. The density of the calcium silicate board was 900kg/m³.

3 CLASSIFICATION

The classification has been carried out in accordance with EN 13501-1.

| Fire behaviour | Smoke production | | | Flaming droplets | | |
|----------------|------------------|---|----------|------------------|---|----------|
| <i>B</i> | - | s | <i>1</i> | - | d | <i>0</i> |

Reaction to fire classification: *B- s1, d0*

Test Report

Issue Date: 2019-11-22

Intertek Report No. 191106001SHF-001

Test Items, Method and Results:

4 Test Photos of EN 13823




Before test (Long wing)



Before test (Short wing)



After test (Long wing)

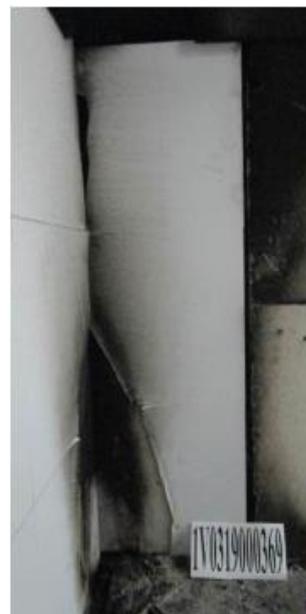

After test (Short wing)

Test Report

Issue Date: 2019-11-22

Intertek Report No. 191106001SHF-001

Appendix A: Sample Received Photo



Front view



Section view

Revision:

| NO. | Date | Changes | Author | Reviewer |
|------------------|------------|-------------|----------|-----------|
| 191106001SHF-001 | 2019-11-22 | First issue | Tod Qian | Sally Xie |